

VERTICAL WALL BARS

SEE NOTE 4

MANURE

1°-4" MIN.

3" COVER ON VERTICAL WALL

## SHOWING CORNER DETAIL WALL ELEVATION


## TIE LONG LEG OF MARK(L)CORNER BAR TO WALL SECTION SHORT LEG OF MARK (L)BARS SHALL BE SUPPORTED WITH T&S STEEL WHERE THE SPACING MATCHES.

PLACE FIRST VERTICAL BAR (SEE PLAN VIEW) AT VERTICAL WALL SUPPORT BAR (1). 18 MARK(L)BARS PER CORNER.

WALL CORNER, OR NO FARTHER THAN ONE-HALF THE VERTICAL

BAR SPACING FROM THE CORNER.

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE. IT WAS DEVELOPED IN COOPERATION WITH THE WISCONSIN DATCP. THE DESIGN FOLDER IS LOCATED AT THE NRCS STATE OFFICE, 8030 EXCELSIOR DRIVE, MADISON, WI. 53717-2906

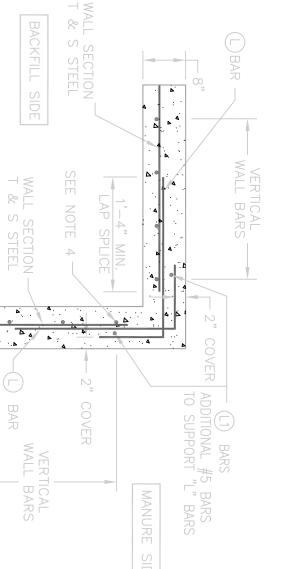

REVERSE CORNER DETAIL

(ADAPTED FROM WI-576, APRIL 2005)

File No. PA-027B

PA-027B 07/06/07 12:58

6' WALL CORNER DETAILS (W/SURCHARGE)

<u>06/23/0</u>5

ADDITIONAL #5 BARS — TO SUPPORT "L" BARS

WALL BARS - 2" COVER

BACKFILL SIDE

WALL CORNER DETAIL

WALL SECTION T & S STEEL

COUNTY, PENNSYLVANIA